

Crimson ^{CTC} Trace™

INSTALLATION INSTRUCTIONS

OWNER'S MANUAL ADDENDUM FOR:

LG-436

Glock

Fits: 19, 26, 36

L A S E R G U A R D™

Please read entire Owner's Manual prior to installing and using your new Laserguard.

Thank you for selecting the finest laser sighting system: Crimson Trace Laserguard.

When it comes to speed, accuracy and security, Crimson Trace is the top choice of law enforcement, militaries and legally armed citizens around the world.


OPERATING INSTRUCTIONS

The LG-436 is activated by a strategically located pressure pad - located on the front strap directly beneath the trigger guard. With a normal shooting grip, your middle finger will naturally hit the pressure pad whether shooting right or left-handed.

Master ON/OFF switch is located on the left-side of the Laserguard and is activated and deactivated by pressing the master switch firmly for less than two seconds. **Turning the master switch "OFF" will NOT increase battery life.**

INSTALLATION INSTRUCTIONS

1. Make sure firearm is unloaded. Remove magazine and double check that chamber is empty. (See "Four Basic Rules Of Firearm Safety" in Owner's Manual.)
2. Insert battery with the flat, (+) side visible (on top), and place battery into the right side of Laserguard
3. Slide laser side of Laserguard under the trigger guard and snap into place. Ensure activation button hooks around to the left side of the trigger guard and rests on the front of the front strap.
4. Hook left-side of Laserguard into the right, at an angle, by inserting into locking grooves. Apply pressure to the front of both sides until both sides join tightly together without a gap.
5. Install the two screws (provided) into the left-side (non laser side) of the Laserguard using the .050" hex wrench (provided).
6. Laserguards are default set at the factory to be in the "ON" position. Test the master on/off switch (located on the left-side of Laserguard) by pressing firmly for less than two seconds, and then pressing the activation pad. Laser should not activate. To turn back on, firmly press master on/off switch less than two seconds.
6. Attach laser "Danger" sticker to outside of pistol. Attach "Aperture" warning label with the arrow pointing to the laser aperture.
7. Confirm that laser and iron sights are in alignment. Laser dot should rest on top of front site post with correct iron sight picture. Laserguards are sighted-in at the factory at 50', but can be fine-tuned for windage and elevation. (See Lasergrips Owner's Manual for complete sighting info.)

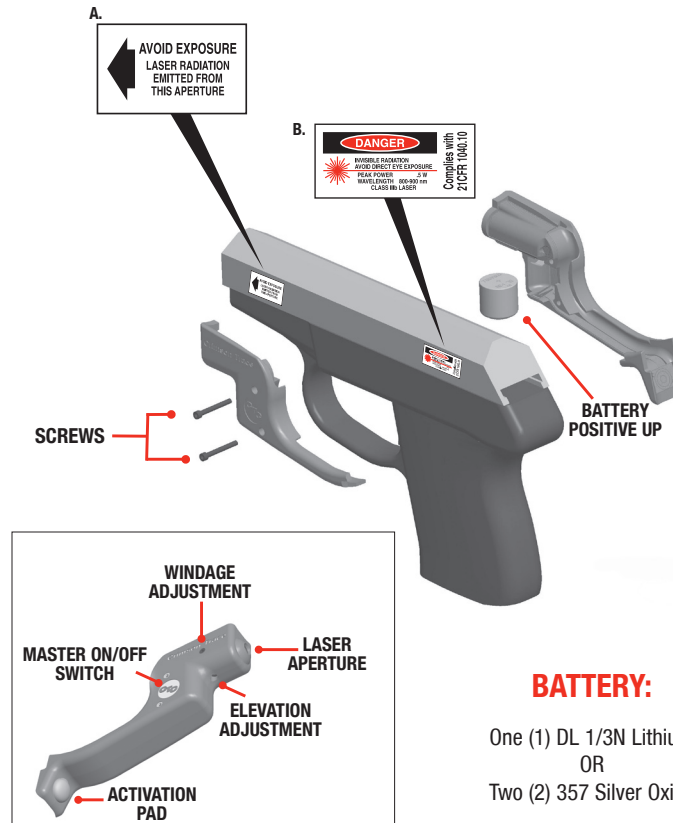

BATTERY:

One (1) DL 1/3N Lithium
OR
Two (2) 357 Silver Oxide

LASER SAFETY LABELING

IMPORTANT: LASER PRODUCTS MUST ONLY BE OPERATED WITH THE SAFETY LABEL APPLIED TO THE FIREARM.

Labels could not be affixed to the product but are supplied and must be installed as indicated below:

A. Attach the "Danger" warning label to the outside of the firearm.

B. Attach the "Aperture" warning label with the arrow pointing to the laser aperture.

Use caution when activating the laser to avoid direct eye exposure, which can result in permanent eye damage. Follow all precautions as outlined by the firearms manufacturer. Keep this and all firearm related products locked and secured from children or other unauthorized users.

**MADE
IN USA**

27-4163 LG436 Rev 3

Phone: (800) 442-2406 or (503) 783-5333 / Fax: (503) 783-5334
Customer Service E-mail: customer@crimsontrace.com
www.crimsontrace.com
9780 SW Freeman Drive, Wilsonville, OR 97070